

Contact Details:

Toll Free Number: 8008182277

Service Charges:

- a) Collection and Transportation: Rs 190 /- to Rs 356/- Per MT (Depending upon the distance and the ward)
- b) Processing and Disposal : Rs 306/- Per MT

** Applicable Taxes : 18% GST on Private / Individual/ Private waste generator.




80 TPD – CONSTRUCTION AND DEMOLITION WASTE AT VISHAKHAPATNAM

**Pro Enviro C&D Waste Management Pvt Ltd
Vijayawada**

PROPOSED APPROACH AND METHODOLOGY


- COLLECTION AND TRANSPORTATION :

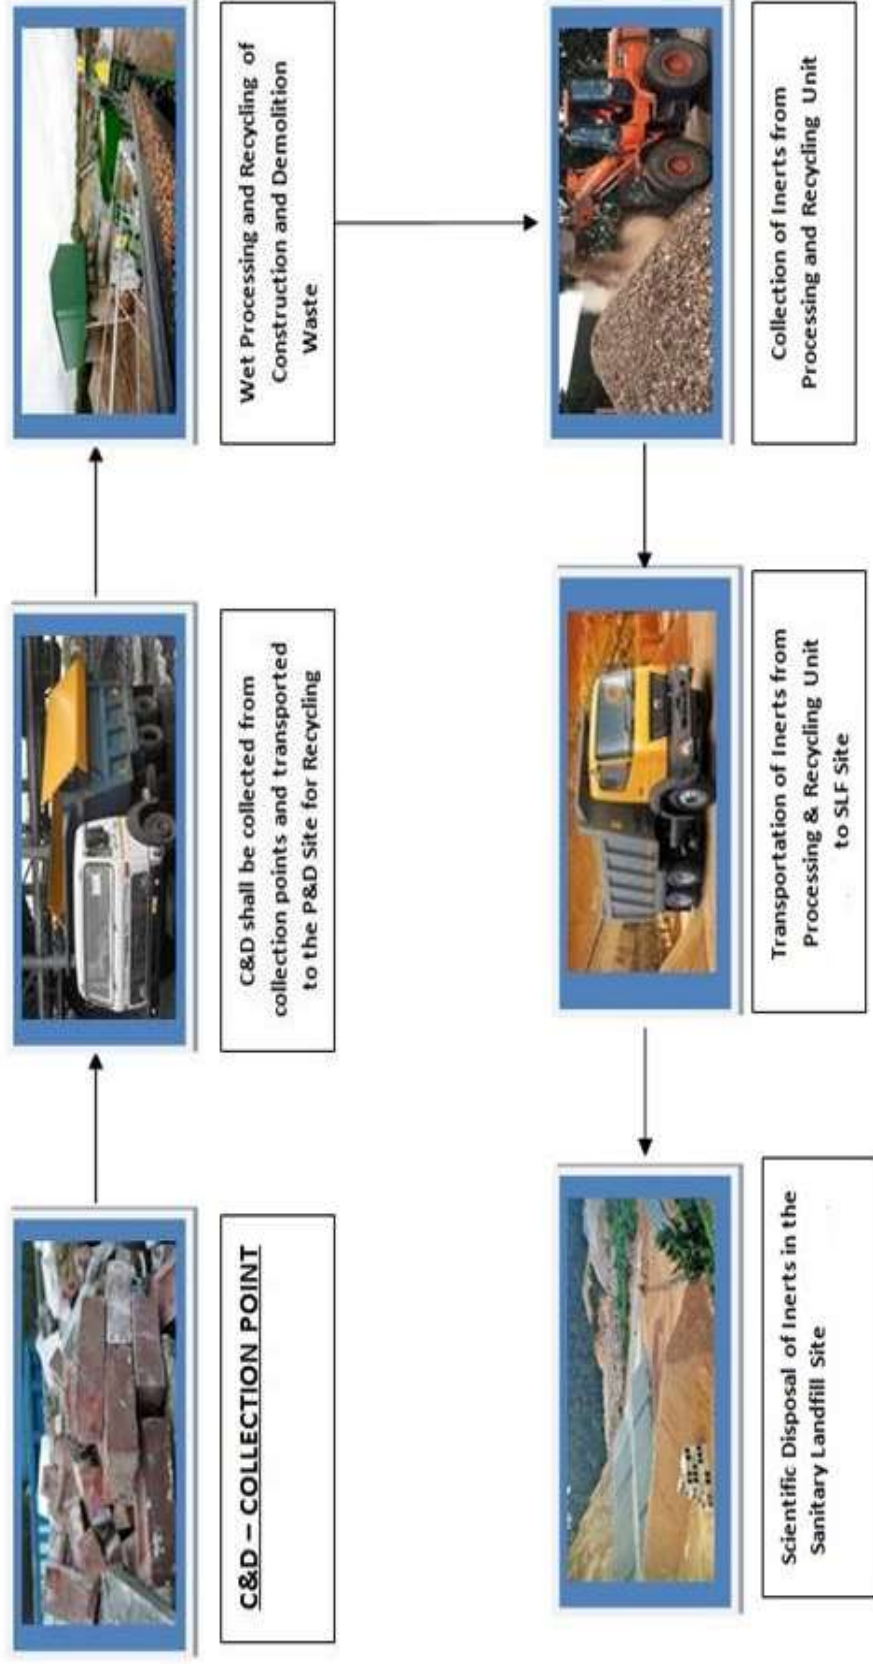

PROPOSED APPROACH AND METHODOLOGY

- **PROCESSING AND RECYCLING :**

The proposed plant will have a specialized Segregation System, Debris Handling System, Multiple Screening System followed by Material Washing, Sand Washing and Water Management System.

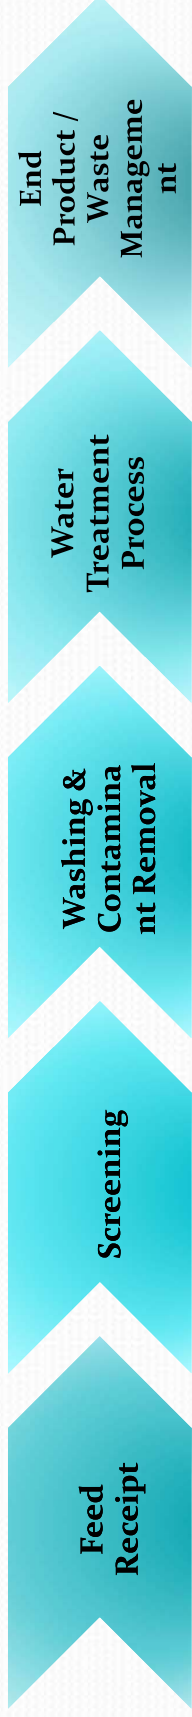

PROPOSED APPROACH AND METHODOLOGY

● PROCESSING AND RECYCLING :



HOPPER & FEEDER

- Feeding of Material into the hopper, with an initial Screen of 200 mm.



SEGREGATION

- Separation of Concrete and Bricks.
- Separation of Concrete Blocks over 200 MM in size and stacking them separately.



CRUSHING / SIZE REDUCTION

A crusher will reduce the size of the concrete blocks to the desired size depending upon the end use.



FEED CONVEYOR

Feed Conveyor will be used to feed the crushed material to prorate / water rinsing unit.



SCREENING

Crushed Material will be sent to the Log Washer to separate light contaminants (Wood & Plastics) and to improve quality and to retrieve fine particles

PROPOSED APPROACH AND METHODOLOGY

● PROCESSING AND RECYCLING :



WASHING UNIT

- Washing unit will consist of Rinsing & Resizing Screens which are used to size aggregates.
- Dry Aggregated will be removed and stockpiled in separate bays.



FINES RECOVERY

- Washed Sand of -3 mm to +75 Microns will be recovered which is free from any slit.



WATER TREATEMENT

75 Micron material is treated through water specifically chosen flocculent is added to it for formation of condensed sludge.



FILTER PRESS

Filter Press Section will remove the water from sludge and take 80% of dry solids and drop the solids into a final bay (which can be used for brick making)

SCHEDULE III : COLLECTION & TRANSPORTATION FEES

GREATER VISAKHAPATNAM MUNICIPAL CORPORATION

**STATEMENT SHOWING THE LOADING, UN-LOADING AND TRANSPORTATION(17-18) OF C&D WASTE FROM WARDS TO PROPOSED SITE
(KAPULUPPADA DUMPING YARD)**

S.No	Zone	Ward No.	Total Lead in Km	Loading By Mechanical (Rate/Cum)	Un loading (Rate/cum)	Deduct 13.615% on loading	Balance loading charges	40% of MA on loading	Conveyance (Rate/cum)	Total Cost	Add 13.615% contractors profit	Total Cost per cubic meter	Rate Per Ton (Column 13/2)
1	2	3	4	5	6	7	8	9	10	11	12	13	14
1	I	1	12.00	93.60	0	0.00	93.60	0.00	158.80	252.40	0.00	252.40	126.20
2	I	2	14.00	93.60	0	0.00	93.60	0.00	182.00	275.60	0.00	275.60	137.80
3	I	3	15.00	93.60	0	0.00	93.60	0.00	193.60	287.20	0.00	287.20	143.60
4	I	4	27.00	93.60	0	0.00	93.60	0.00	332.80	426.40	0.00	426.40	213.20
5	I	5	27.00	93.60	0	0.00	93.60	0.00	332.80	426.40	0.00	426.40	213.20
6	I	6	29.00	93.60	0	0.00	93.60	0.00	356.00	449.60	0.00	449.60	224.80
7	II	7	19.00	93.60	0	0.00	93.60	0.00	240.00	333.60	0.00	333.60	166.80
8	II	8	18.00	93.60	0	0.00	93.60	0.00	228.40	322.00	0.00	322.00	161.00
9	II	9	18.00	93.60	0	0.00	93.60	0.00	228.40	322.00	0.00	322.00	161.00
10	II	10	19.00	93.60	0	0.00	93.60	0.00	240.00	333.60	0.00	333.60	166.80
11	II	11	19.00	93.60	0	0.00	93.60	0.00	240.00	333.60	0.00	333.60	166.80
12	II	12	20.00	93.60	0	0.00	93.60	0.00	251.60	345.20	0.00	345.20	172.60
13	II	13	22.00	93.60	0	0.00	93.60	0.00	274.80	368.40	0.00	368.40	184.20
14	II	14	20.00	93.60	0	0.00	93.60	0.00	251.60	345.20	0.00	345.20	172.60
15	II	15	21.00	93.60	0	0.00	93.60	0.00	263.20	356.80	0.00	356.80	178.40
16	II	16	20.00	93.60	0	0.00	93.60	0.00	251.60	345.20	0.00	345.20	172.60
17	II	17	21.00	93.60	0	0.00	93.60	0.00	263.20	356.80	0.00	356.80	178.40
18	II	18	22.00	93.60	0	0.00	93.60	0.00	274.80	368.40	0.00	368.40	184.20
19	III	19	21.00	93.60	0	0.00	93.60	0.00	263.20	356.80	0.00	356.80	178.40
20	III	20	23.00	93.60	0	0.00	93.60	0.00	286.40	380.00	0.00	380.00	190.00
21	III	21	23.00	93.60	0	0.00	93.60	0.00	286.40	380.00	0.00	380.00	190.00
22	III	22	24.00	93.60	0	0.00	93.60	0.00	298.00	391.60	0.00	391.60	195.80



COMMISSIONER

CONCESSIONAIRE

SCHEDULE III : COLLECTION & TRANSPORTATION FEES													
GREATER VISAKHAPATNAM MUNICIPAL CORPORATION													
STATEMENT SHOWING THE LOADING, UN-LOADING AND TRANSPORTAION(17-18) OF C&D WASTE FROM WARDS TO PROPOSED SITE													
(KAPULUPPADA DUMPING YARD)													
S.No	Zone	Ward No.	Total Lead in Km	Loading By Mechanical (Rate/Cum)	Un loading (Rate/cum)	Deduct 13.615% on loading	Balance loading charges	40% of MA on loading	Conveyance (Rate/cum)	Total Cost	Add 13.615% contractors profit	Total Cost per cubic meter	Rate Per Ton (Column 13/2)
23	III	23	24.00	93.60	0	0.00	93.60	0.00	298.00	391.60	0.00	391.60	195.80
24	III	24	26.00	93.60	0	0.00	93.60	0.00	321.20	414.80	0.00	414.80	207.40
25	III	25	26.00	93.60	0	0.00	93.60	0.00	321.20	414.80	0.00	414.80	207.40
26	III	26	24.00	93.60	0	0.00	93.60	0.00	298.00	391.60	0.00	391.60	195.80
27	III	27	22.00	93.60	0	0.00	93.60	0.00	274.80	368.40	0.00	368.40	184.20
28	III	28	23.00	93.60	0	0.00	93.60	0.00	286.40	380.00	0.00	380.00	190.00
29	III	29	23.00	93.60	0	0.00	93.60	0.00	286.40	380.00	0.00	380.00	190.00
30	III	30	22.00	93.60	0	0.00	93.60	0.00	274.80	368.40	0.00	368.40	184.20
31	IV	31	27.00	93.60	0	0.00	93.60	0.00	332.80	426.40	0.00	426.40	213.20
32	IV	32	26.00	93.60	0	0.00	93.60	0.00	321.20	414.80	0.00	414.80	207.40
33	IV	33	27.00	93.60	0	0.00	93.60	0.00	332.80	426.40	0.00	426.40	213.20
34	IV	34	27.00	93.60	0	0.00	93.60	0.00	332.80	426.40	0.00	426.40	213.20
35	IV	35	28.00	93.60	0	0.00	93.60	0.00	344.40	438.00	0.00	438.00	219.00
36	IV	36	27.00	93.60	0	0.00	93.60	0.00	332.80	426.40	0.00	426.40	213.20
37	IV	37	28.00	93.60	0	0.00	93.60	0.00	344.40	438.00	0.00	438.00	219.00
38	IV	38	27.00	93.60	0	0.00	93.60	0.00	332.80	426.40	0.00	426.40	213.20
39	IV	39	26.00	93.60	0	0.00	93.60	0.00	321.20	414.80	0.00	414.80	207.40
40	IV	40	26.00	93.60	0	0.00	93.60	0.00	321.20	414.80	0.00	414.80	207.40
41	IV	41	26.00	93.60	0	0.00	93.60	0.00	321.20	414.80	0.00	414.80	207.40
42	IV	42	25.00	93.60	0	0.00	93.60	0.00	309.60	403.20	0.00	403.20	201.60
43	IV	43	29.00	93.60	0	0.00	93.60	0.00	356.00	449.60	0.00	449.60	224.80
44	IV	44	30.00	93.60	0	0.00	93.60	0.00	367.60	461.20	0.00	461.20	230.60
45	IV	45	39.00	93.60	0	0.00	93.60	0.00	454.90	548.50	0.00	548.50	274.25

[Signature]

COMMISSIONER



SCHEDULE III : COLLECTION & TRANSPORTATION FEES

GREATER VISAKHAPATNAM MUNICIPAL CORPORATION

**STATEMENT SHOWING THE LOADING, UN-LOADING AND TRANSPORTATION(17-18) OF C&D WASTE FROM WARDS TO PROPOSED SITE
(KAPULUPPADA DUMPING YARD)**

S.No	Zone	Ward No.	Total Lead in Km	Loading By Mechanical (Rate/Cum)	Un loading (Rate/cum)	Deduct 13.615% on loading	Balance loading charges	40% of MA on loading	Conveyance (Rate/cum)	Total Cost	Add 13.615% contractors profit	Total Cost per cubic meter	Rate Per Ton (Colum 13/2)
46	IV	46	35.00	93.60	0	0.00	93.60	0.00	416.10	509.70	0.00	509.70	254.85
47	IV	47	36.00	93.60	0	0.00	93.60	0.00	425.80	519.40	0.00	519.40	259.70
48	IV	48	37.00	93.60	0	0.00	93.60	0.00	435.50	529.10	0.00	529.10	264.55
49	IV	49	38.00	93.60	0	0.00	93.60	0.00	445.20	538.80	0.00	538.80	269.40
50	V	50	40.00	93.60	0	0.00	93.60	0.00	464.60	558.20	0.00	558.20	279.10
51	V	51	41.00	93.60	0	0.00	93.60	0.00	474.30	567.90	0.00	567.90	283.95
52	V	52	44.00	93.60	0	0.00	93.60	0.00	503.40	597.00	0.00	597.00	298.50
53	V	53	40.00	93.60	0	0.00	93.60	0.00	464.60	558.20	0.00	558.20	279.10
54	V	54	0.00	0.00	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	V	55	56.00	93.60	0	0.00	93.60	0.00	619.80	713.40	0.00	713.40	356.70
56	V	56	52.00	93.60	0	0.00	93.60	0.00	581.00	674.60	0.00	674.60	337.30
57	V	57	53.00	93.60	0	0.00	93.60	0.00	590.70	684.30	0.00	684.30	342.15
58	V	58	42.00	93.60	0	0.00	93.60	0.00	484.00	577.60	0.00	577.60	288.80
59	V	59	38.00	93.60	0	0.00	93.60	0.00	445.20	538.80	0.00	538.80	269.40
60	V	60	38.00	93.60	0	0.00	93.60	0.00	445.20	538.80	0.00	538.80	269.40
61	V	61	42.00	93.60	0	0.00	93.60	0.00	484.00	577.60	0.00	577.60	288.80
62	V	62	41.00	93.60	0	0.00	93.60	0.00	474.30	567.90	0.00	567.90	283.95
63	V	63	40.00	93.60	0	0.00	93.60	0.00	464.60	558.20	0.00	558.20	279.10
64	V	64	38.00	93.60	0	0.00	93.60	0.00	445.20	538.80	0.00	538.80	269.40
65	V	65	35.00	93.60	0	0.00	93.60	0.00	416.10	509.70	0.00	509.70	254.85
66	VI	66	38.00	93.60	0	0.00	93.60	0.00	445.20	538.80	0.00	538.80	269.40
67	VI	67	32.00	93.60	0	0.00	93.60	0.00	387.00	480.60	0.00	480.60	240.30
68	VI	68	32.00	93.60	0	0.00	93.60	0.00	387.00	480.60	0.00	480.60	240.30



[Signature]

COMMISSIONER

SCHEDULE III : COLLECTION & TRANSPORTATION FEES													
GREATER VISAKHAPATNAM MUNICIPAL CORPORATION													
STATEMENT SHOWING THE LOADING, UN-LOADING AND TRANSPORTAION(17-18) OF C&D WASTE FROM WARDS TO PROPOSED SITE (KAPULUPPADA DUMPING YARD)													
S.No	Zone	Ward No.	Total Lead in Km	Loading By Mechanical (Rate/Cum)	Un loading (Rate/cum)	Deduct 13.615% on loading	Balance loading charges	40% of MA on loading	Conveyance (Rate/cum)	Total Cost	Add 13.615% contractors profit	Total Cost per cubic meter	Rate Per Ton (Colum 13/2)
69	VI	69	35.00	93.60	0	0.00	93.60	0.00	416.10	509.70	0.00	509.70	254.85
70	VI	70	40.00	93.60	0	0.00	93.60	0.00	464.60	558.20	0.00	558.20	279.10
71	VI	71	37.00	93.60	0	0.00	93.60	0.00	435.50	529.10	0.00	529.10	264.55
72	VI	72	26.00	93.60	0	0.00	93.60	0.00	321.20	414.80	0.00	414.80	207.40
73	BML	Bheemili	18.00	93.60	0	0.00	93.60	0.00	228.40	322.00	0.00	322.00	161.00
74	AKP	Anakapalli	56.00	93.60	0	0.00	93.60	0.00	619.80	713.40	0.00	713.40	356.70



CONCESSIONAIRE

32/

COMMISSIONER